


H-6

H-6


MINIMUM POLE CLASS

- CCTV camera assembly or vehicle detection system
- Overhead bundle consisting of a $^3\!/\!\!g$ messenger wire and overhead conductors and lashing wire
- Luminaire with mast arm
- Pedestrian push button assembly or accessible push button assembly
- Signal face with 3 indications or single sheet sign panel (10 SQFT Max)
- 6 Riser with weather head as required
- (7) Pull box as required
- <u>®</u> Grounding as required
- 9 ¾" Ø tether wire
- Pedestrian signal head

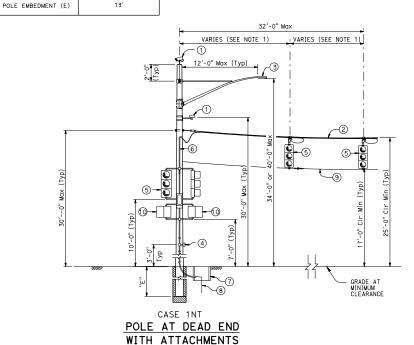

NOTE:

Maximum of 2 SIGNAL FACES per span within the hatched regions indicated by "LOCATION OF SIGNAL FACES".



LOCATION OF SIGNAL FACES

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

TEMPORARY WOOD POLES NON-GUYED-WITH SIGNAL FACES ON SPAN

NO SCALE

RSP ES-18E DATED JANUARY 20, 2017 SUPPLEMENTS THE STANDARD PLANS BOOK DATED 2015.

REVISED STANDARD PLAN RSP ES-18E

STANDARD

PLAN

RSP

ES-18E